






# DESCRIPTION

LP - 14 use for check the fluid level inside the tank. By installing the flange on the side of the tank. Float switch will move up and down follow with Liquid level that make The NO / NC contacts operate . Due to the length of the float rod makes the movement in the up - down wide. Suitable for wide range of liquids for industrial and marine applications. Both internal switch and housing IP-65


### TECHNICAL DATA

Output Relay	SPDT [ ]
Voltage	Max. 400 Vac/Dc
Current	Max. 1 A
Material	SUS304
Operation Temperature	80 °C
Position Operation	45 °C

# SIZE AND DIMENSION

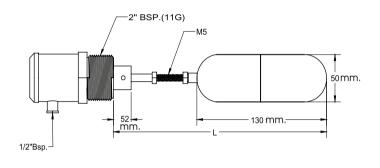

### **ORDERING**



#### Remark:

• Standard model LP - 14 - D4 - L1